ISTRUZIONI MONTAGGIO ASTA TELESCOPICA AT1521X



1. Svitare il pomello



2. Collegare la macchina alla testa dell'asta



3. Non inserire gli spessori in gomma, stringere il pomello per bloccare l'utensile



4. Assemblare la cinghia



5. Per allungare l'asta tenere premuto il pulsante e tirare il manico



6. Collegare la batteria all'estremità dell'asta



7. Per iniziare a lavorare accendere l'alimentazione e premere il grilletto



8.Asta telescopica assemblata

ASSEMBLAGGIO GANCIO



1.. Inserire il gancio nella fessura sulla testa dell'asta; la direzione del gancio è verso il basso



2. Inserire il dado e stringere la vite



3.Asta telescopica assemblata con gancio

ATTENZIONE!

- Non toccare la lama di taglio mentre la macchina è dotata di batteria
- Non consentire ai bambini o ai non professionisti di toccare il dispositivo
- Quando si lavora con l'attrezzatura, indossare l'equipaggiamento di sicurezza corretto
- È vietato accorciare o allungare l'asta verticalmente, l'operazione deve essere effettuata in piano per evitare di essere colpiti dall'attrezzatura
- Questo strumento è un prodotto multifunzionale, si prega di installare l'apparecchiatura correttamente quando la si utilizza per garantire la propria sicurezza



NOTE:
è severamente vietato esercitare un'eccessiva pressione laterale all'attrezzo per evitare la deformazione dei tubi che potrebbero non scorrere più fluidamente tra di loro

Nota:
1.La batteria deve essere spenta prima dello smontaggio e della manutenzione.
2.Assicurarsi che le parti meccaniche siano installate correttamente prima di collegare la batteria.
Seguire scrupolosamente le istruzioni.

ASSEMBLY INSTRUCTIONS FOR TELESCOPIC POLE AT1521X



1. Loosen the knob



2. Connect the machine to the pole head



3. Do not insert rubber, tighten the knob to lock the tool



4. Install the strap



5. To extend the pole, hold down the button and pull the handle



6. Attach the battery to the end of the pole



7. To start working, turn on the power and press the trigger



8.Assembled telescopic pole

HOOK INSTALLATION



1. Insert hook into the empty slot at the pole head, the direction of the hook is downward




2. Insert the nut and tighten the screw



3.Assembled telescopic pole with hook

WARNING

- Do not touch the cutting blade while the machine is equipped with a battery
- Do not allow children or non-professionals to touch the device
- When working with the equipment, wear the correct safety equipment
- It is forbidden to shorten or lengthen the rod vertically; the operation must be done flat to avoid being hit by the equipment
- This tool is a multifunctional product, please install the correct equipment when using it to ensure your safety

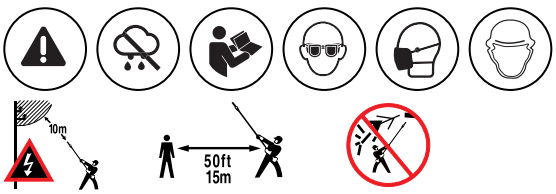

NOTES:
it is strictly forbidden to exert excessive lateral pressure on the tool to avoid deformation of the tubes, which may no longer flow between them

Note:
1.The battery must be turned off before disassembley and maintenance.
2.Make sure that the machanical parts are installed correctly before connecting the battery.
Follow the instructions carefully